

ELON[®] 100

Solar PV water heating system

Add warmth to life.

**The most
cost-effective Solar
Water Heating
solution.**



ELON[®] 100

Solar PV water heating system

Conventional wisdom has it that solar thermal is the most cost-effective solar water heating solution. Well, it is time to update conventional wisdom!

The innovative and patented PowerOptimal Elon[®] breaks the mould in bringing solar PV (photovoltaic) and water heating together in the most cost-effective package ever. Meeting national building regulations on water heating is now made easy with the PowerOptimal Elon[®].


With competitive capital cost, very long lifetimes and almost non-existent maintenance, this is the lowest cost per kWh of water heating your money can buy anywhere.

How it works

The Elon[®] uses advanced proprietary switching technology to allow for direct provision of DC (Direct Current) power from solar PV (photovoltaic) modules to electric water heater and optimised solar power use in a single compact unit.


The system can be connected to the grid (AC mains) as well, and intelligently switches between AC and solar power supply.

It requires no inverter and no battery, and can be connected to standard AC water heater heating elements and AC thermostats, which translates into the most cost-effective solar water heating option today.

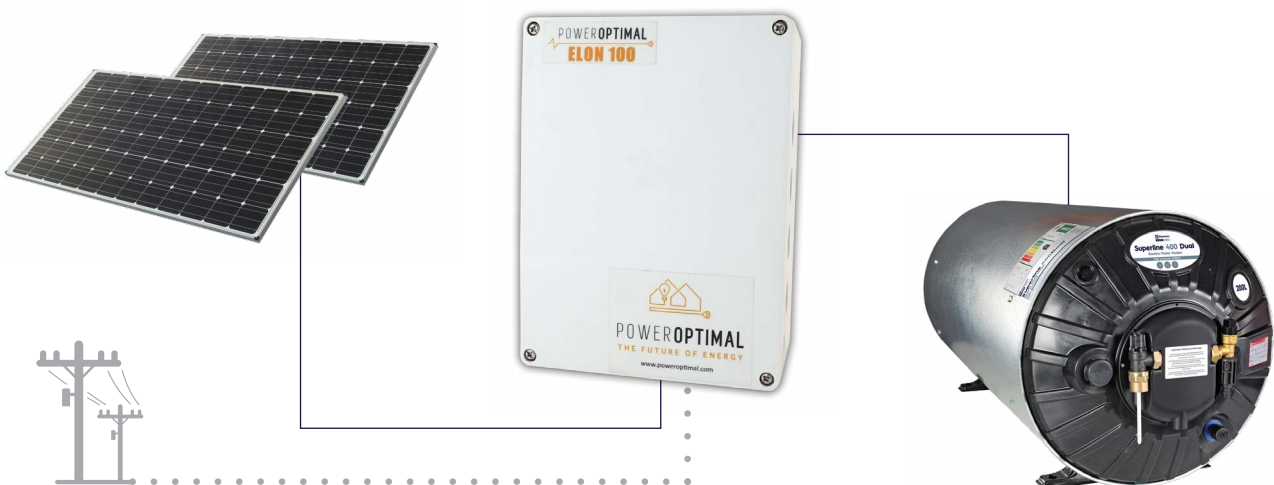



Main unit



User controller

The complete Elon® 100 system comprises of a control switch, a connection box, a cable to connect them and an element adapter for the water heater thermostat and element. All these items can also be purchased individually.

Product Code	Description
--------------	-------------

SOL-PVE-SYSTEM Complete Elon® 100 System

Consisting of:


SOL-PVE-CNTRLBOX	Main unit
SOL-PVE-CNTRL	User controller
SOL-PVE-CABLE	Controller cable
SOL-PYE-WIRE	Element adapter

Features

- The simplest, most cost-effective and convenient way to meet SANS 10400-XA requirements.
- The most affordable Solar Water Heating solution and Solar PV unit in its class.
- Runs completely off-grid or with AC power as back-up.
- No inverter or battery needed.
- Maintenance-free.
- Up to 5-year extended warranty (registration required).

Typical Installation specifications

Superline Dual Water Heater (600kPa) - Sans 10254 Installation compliant.

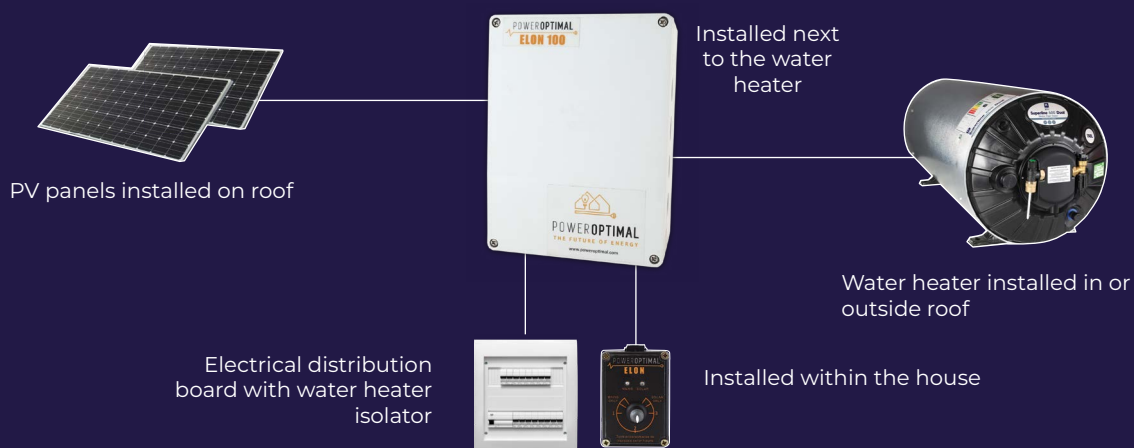

Elon® kit easy selection guide (element matching)

Solar PV array size (kW _p)	Matching water heater element size (kW)	Water heater (water tank) size (L)
1 - 1.2	4 or 3	100 - 200
1.2 - 1.6	3 or 2	100 - 200
1.5 - 2	2	150 - 300
2.4 - 3.2 (two parallel PV strings)	4	150 - 300
3 - 4 (two parallel PV strings)	4	200+


Short-circuit current @ STC I_{SC} < 20A Open-circuit voltage @ STC V_{OC} < 240V

What are the benefits?

Based on a lifetime cost per kWh of water heating (Levelised Cost of Energy or LCOE), the Elon® brings you the lowest cost of any water heating option in South Africa at about R1.15/kWh.

The average residential price of electricity in South Africa in 2024 (based on a middle-class household in the four largest metropolitan areas) is about R3.12/kWh and increases every year. Reduce your exposure to ever-increasing electricity prices by installing an Elon® system.

Overall cost* for Residential Water Heating (R/kWh)

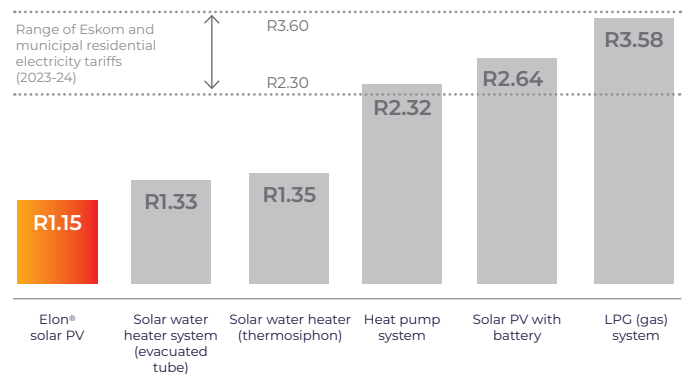

*overall cost includes capital cost, installation, operations, maintenance, fuel cost over total lifetime. It is the Levelised Cost of Energy (LCOE).


There are many other **benefits** to the PowerOptimal Elon® solar PV water heating system:

- No tank on the roof.
- Easy installation - no plumbing changes for retrofit.
- You can use your existing electric water heater.
- No noise (unlike heat pumps or solar water heaters with circulation pumps).
- Lower weight of rooftop components compared to solar water heaters means easier installation.
- Much longer life and lower maintenance than solar thermal or heat pump systems.
- Intelligent grid power backup means you won't have cold water even when there is no sun, whilst grid power use is minimised.
- Excellent option for meeting SANS 10400-XA energy efficiency requirements.
- Hot water during power failures.
- The patented AC-DC switching technology is the smallest and lowest cost solar DC switching solution on the market.
- Less vandal- and hail-prone than solar water heater systems.
- Delivers power to loads at lower voltage than what is possible with inverters (from just 20V under load).
- Control dial gives full control over operation (from mains power only to solar power only).

What are the savings?

The diagram to the right shows a comparison of the energy cost per shower for various energy supply options.

Energy cost per shower

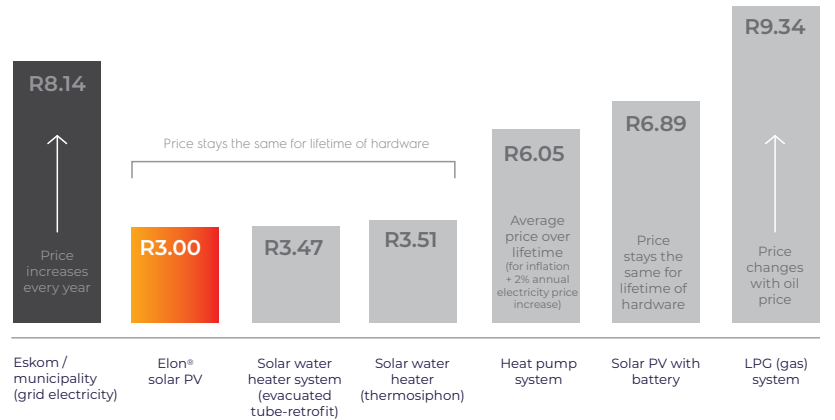

(6 min, 15 L/minute, 40 °C. Water cost per shower = R4.47)

Frequently asked questions

How can solar PV water heating be more cost-effective than solar thermal? Isn't solar thermal efficiency much better than solar PV?

It is true that solar thermal collectors are currently more efficient per square meter (area) than solar PV modules in collecting solar energy. However, overall efficiency must also take into consideration factors such as heat loss in piping (especially in winter) and energy use of solar thermal circulation pumps.

Solar thermal system lifetimes range from about 7 years (for cheap imports) to about 15 years for high quality (and more expensive) systems. (In a comprehensive analysis, Sandia National Laboratories found that about 50% of solar thermal systems fail within a 10-year period.) Solar PV modules are routinely guaranteed at 80% performance after 25 years, and the US National Renewable Energy Laboratory uses a lifetime of 33 years in its solar PV system calculations.

Solar PV module costs have dropped dramatically – by over 80% in the past 5 years – and the trend is continuing.

This has changed the paradigm. Whilst solar PV systems will continue to require more roof space than solar thermal in the short term, the key issue is not roof space, but cost. Solar PV systems have become costcompetitive to solar thermal, and the much longer lifetimes and lower maintenance translate into a lower lifetime cost per kWh.

What is SANS 10400-XA?

It is a set of energy efficiency regulations that are

compulsory for new buildings and for additions and extensions to existing buildings. One of the key requirements of SANS 10400-XA is that no more than 50% of the annual volume of domestic hot water must be heated using grid electricity.

The PowerOptimal Elon® makes meeting this requirement easier than ever before, providing a new costeffective alternative to heat pump and solar thermal systems.

Do I need to change the heating element on my existing water heater to install a PowerOptimal Elon® system?

Not necessarily. PowerOptimal Elon® works with existing standard AC heater elements, but the best element size (power rating) depends on the size of your solar PV array. If you are building a new house, you can just specify the right heater element from the start. Refer to the table on the next page for a guide or ask the PowerOptimal agent or your installer about the best module & element matching configuration for your needs.

Where can I buy an Elon® system?
















For installers and resellers: Kwikot (part of Electrolux South Africa) is the sole distributor of the PowerOptimal Elon® in South Africa. Contact David Crawley (Product Manager: Water Care APAC & MEA) at david.crawley@electrolux.com for more information. International enquiries can be directed to PowerOptimal.

For residential customers: Contact PowerOptimal to get a referral to one of our preferred installers depending on your location.

How many solar modules do I need?

The most important factor here is the total size or power of the solar PV array (measured in kilowatt or kWp) rather than the number of modules. The size of solar PV array required depends on the number of people in the household and your hot water usage levels. A recommended minimum array size of 1.2 kWp with an absolute minimum of 1.0 kWp.

Below is an easy selection guide. Refer to the PowerOptimal Elon® 100 Technical Specifications or the full selection guide (available on the downloads page) for a more detailed guide.

Solar PV array size (kWp)	Showers per day*	50%+ of daily hot water use provided for how many people?	How many people off-grid for hot water?	Typical no of solar PV modules
1 - 1,2				2 - 3 modules
1,2 - 1,6				3 - 4 modules
1,5 - 2				4 - 5 modules
2,4 - 3,2 (2 parallel PV strings)				6 - 8 modules
3 - 4 (2 parallel PV strings)				8 - 10 modules

* 6-minute showers at 40 °C with 8 litre/min (low-flow) showerheads

What is the payback period for an Elon® system?

This depends on your current electricity tariff, how many solar modules you install, your hot water use, and electricity price increases in the next few years, but typically payback period is in the range of 2½ to 4 years.

With a typical solar module life expectancy of more than 30 years, this means that you will enjoy at least 25 years of free hot water!

Where can I learn more about the PowerOptimal Elon®?

Visit our website at www.poweroptimal.com or contact the PowerOptimal team for more information and technical data sheets.

About PowerOptimal

PowerOptimal is an award-winning company with a mission to bring affordable, reliable and sustainable energy solutions to households and businesses across the African continent. The company is built on proven South African electricity demand management technology, with a strong track record of successful installations over more than 10 years.



Product warranty

The Elon[®] 100 has a two-year (extendable to 5 years on registration) warranty period from date of purchase on presentation of a proof of purchase receipt, against any manufacturing defect, whereby the unit will be either repaired or replaced. The warranty does not include abuse, misuse, improper use and testing, negligence, altering or tampering of the unit and the repair by a third party, nor the installation of the product. The unit must only be installed by an electrical contractor registered with the South African Department of Labour and installed in accordance with supplied manual.

Kwikot is the sole supplier of the PowerOptimal Elon[®] in South Africa, and it can be purchased from any one of Kwikot's branches.



Scan here for more information. Training available.

Patented: GB2583814
ZA2019/02129

Pictures may vary from the actual product. Specifications may differ and will be subject to actual products (E&OE).



KWIKOT

www.kwikot.com

Gauteng
3 Aberdeen Road,
Industrial Sites, Benoni
(011) 897 4600
Sales.Inland@electrolux.com
Sales.Export@electrolux.com

Western Cape
15 Purdey Road,
Sheffield Business Park,
Phillippi, Cape Town
(021) 690 2700
Sales.Westerncape@electrolux.com

Eastern Cape
39-41 Leadwood Crescent,
Fairview,
Port Elizabeth
(041) 399 4000
Sales.Easterncape@electrolux.com

Support
za-insure@electrolux.com
(warranty and service support)
Technical.info@electrolux.com
(technical queries)

KwaZulu-Natal
814 Peter Close, Springfield Park,
Durban
(031) 574 8700
Sales.Kwazulunatal@electrolux.com